



Minibars

SECURITY **TECHNOLOGY** CONFIDENCE **EXPERIENCE** QUALITY **SERVICE**



Minibars

OMNitec

P.I. Empresarium
C/ Retama, 20-22, Naves 15 y 16
50720 - Zaragoza (Spain)
T +34 976 107 201
info@omnitecsystems.com

www.omnitecsystems.com



cool sensations for your guests



OMNitec

Think Cool



Minibars

think cool





technologies for any situation



OMNITEC absorption Minibars are the traditional solution for hotels, providing maximum service to guests with a totally silent and reduced power consumption cooling system. Technological elements such as the electronic thermostat or the auto-defrost system optimize the energy efficiency of these minibars and reduce hotel operating costs. More than 300,000 units installed in hotels on 5 continents guarantee reliability and quality.

- **Silent:** does not generate any noise, 0dB
- **Cost Effective:** no maintenance



Thermoabsorption minibars, with mixed Peltier/Absorption technology, are specifically designed for hotels and the hospitality sector. Their cooling system, without moving parts, turn our minibar models into a 100% silent, highly energy efficient minibar.

- **Silent:** no moving parts, 0dB
- **Efficient:** up to Class E



Advances and performance improvement in **compressor technology** has led to a continuing growth in the use of compressor minibars in hotels. High cooling capacity and energy efficiency are the main features of **OMNITEC** compressor minibars that will satisfy the needs of the most demanding hotels.

- **Efficient:** up to A
- **Powerful:** faster cooling
- **Cost Effective:** no maintenance

think forward

Quality that guarantees customer satisfaction

OMNITEC SYSTEMS has accumulated an experience of more than 25 years developing, manufacturing and commercializing Electronic Locks, Safes and Minibars. Today, **OMNITEC** is one of the most **recognized brands in the HOSPITALITY sector**, with a guarantee of quality and service on the 5 continents.

A highly specialized team in all areas and a totally market-oriented focus have made it possible for **OMNITEC SYSTEMS** to develop solutions for security and comfort. By connecting this team with the logistics centres in Europe, America and Asia, today we are able to be present in more than 10,000 hotels around the world, including the most prestigious international hotel chains.

Leaps in quality and specialization do not occur by chance. A continuous investment in R+D, guaranteed by our knowledge of the market, has led to **OMNITEC SYSTEMS** being at the forefront of the sector.

We would like to introduce you to **OMNITEC's** range of minibars, and we are confident that you will find one that fits your needs, whichever these may be.

OMNITEC Minibars

PURE-N model

Minibar that features the highest technical specifications and technologies for hotels that demand a top of the range minibar.



COMFORT

Modern design and limited consumption to satisfy the most demanding customers

DESIGN



PERFORMANCE AND EFFICIENCY

High performance for the most demanding hotels

The PURE-N minibar combines a modern and elegant interior design with advanced technology components such as an oversized diffuser and a smart thermostat which cannot be adjusted by the guest.

OMNITEC, international partner for quality and performance

general characteristics

- **Technology:** absorption, with oversized diffuser
- **Voltage:** 220-240 V (110 V optional)
- **Power:** 65 W
- **Energy Efficiency:** G

standard features

- Silent, 0dB
- Auto-defrost
- Oversized diffuser
- Microprocessor controlled thermostat
- Additional hinge for left opening. Easy and fast change
- Electronic interior LED
- Trays and racks adjustable in height and depth, maximum use of the minibar
- Higher isolation, reduces consumption and increase its cooling power

available dimensions

volume	dimensions height x width x depth	consumption	efficiency
30 litres	525 x 385 x 430 mm	0,51 Kw/24h	A G
40 litres	545 x 435 x 455 mm	0,52 Kw/24h	A G

specific project options



Lock on the minibar door



Casters



Fixed light door opening indicator



Different colors available



Sliding guide



Glass door with bottle rack
Personalization optional
(not available in EU countries)

PURE-T model

Minibar that features the highest technical specifications and technologies for hotels that demand a top of the range minibar.

COMFORT

Modern design and efficient consumption to satisfy the most demanding hotels



40L



30L

DESIGN



PERFORMANCE AND EFFICIENCY



Performance and Efficiency for demanding hotels

The PURE-T minibar combines a modern and elegant interior design with advanced technology components. Smart thermostat which cannot be adjusted by the guest.

OMNITEC, international partner for quality and performance

general characteristics

- **Technology:** Thermoabsorption
- **Voltage:** 220-240 V (110 V optional)
- **Power:** 63 W
- **Energy Efficiency:** E
Glass Door: F

standard features

- Silent, 0dB
- Auto-defrost
- Electronic thermostat
- Additional hinge for left opening. Easy and fast change
- Low consumption LED lamp
- Trays and racks adjustable in height and depth, maximum use of the minibar
- High isolation, reduces consumption and increase its cooling power

available dimensions

volume	dimensions height x width x depth	consumption	efficiency
30 litres	485 x 400 x 430 mm	0,21 Kw/24 h	A++ E
40 litres	543 x 435 x 450 mm	0,21 Kw/24 h	A++ E
30 litres	485 x 400 x 430 mm	0,26 Kw/24h	A++ F
40 litres	543 x 435 x 450 mm	0,26 Kw/24h	A++ F

Glass Door

specific project options



Lock on the minibar door



Casters



Fixed light door opening indicator



Different colors available



Sliding guide



Glass door with bottle rack Personalization optional

ARCO model

Hotel minibar with “drawer type” sliding front opening. Its design guarantees quick and easy access to all minibar contents.



ELEGANCE

The sliding front opening provides extra convenience for the guest and adds a difference to the style of the room



COMFORT



Comfort & Design in its rooms

Drawer minibar equipped with configurable, mobile interior dividers and separators in accordance with the products the hotel offers each season.

OMNITEC, international partner for quality and performance

general characteristics

- **Technology:** Thermoabsorption
- **Voltage:** 220-240 V
- **Power:** 60 W
- **Energy Efficiency:** F

standard features

- **Silent,** 0dB
- **Auto defrost,** prevents the formation of ice on the diffuser without manual maintenance
- Electronic thermostat
- Smooth, convenient **sliding opening**
- Additional tray for mini bottles and snacks
- Adjustable dividers for maximum use of the minibar
- Opening handle integrated in the door
- Energy efficient, interior LED light
- High degree of insulation, reduces energy use and increases power

available dimensions

volume	dimensions height x width x depth	consumption	efficiency
41 litres	417 x 549 x 483 mm	0,33 Kw/24 h	A++ F

specific project options



ECO model

The ECO compressor minibars are designed for demanding environments where cooling power makes a difference to guest comfort.

RENTABILITY

Minibar with the best value for money



Optimal performance, zero maintenance

The ECO compressor minibar offers high cooling capacity without the need for maintenance, and a guarantee of satisfaction for the guest and hotel.

Compressor cooling guarantees high performance in any environment.

OMNITEC, international partner for quality and performance

general characteristics

- **Technology:** Compressor
- **Voltage:** 220-240 V (110 V optional)
- **Power:** 75 W (48 y 70l), 130 W (95l)
- **Energy Efficiency:** E

standard features

- Auto-defrost
- Adjustable thermostat
- Left or right opening. Quick and easy change.
- Bottle racks integrated into the door, maximum use of space

available dimensions

volume	dimensions height x width x depth	consumption	efficiency
48 litres	510 x 450 x 450 mm	0,22 Kw/24h	A E

specific project options



Lock on the minibar door



Casters



Sliding guide



Glass door. Personalization optional



Minibars

recommendations for installation

Our minibars will reach their **maximum performance, minimum consumption** and longest life span working under appropriate conditions of heat diffusion.

Following the directions shown below will allow the minibar to operate at its optimal performance level and therefore yield the highest return on investment.

environmental conditions


The ambient room temperature is crucial for the proper functioning of the minibar. A high ambient temperature reduces the airflow around the minibar and its ability to dissipate heat, this will influence the performance of the minibar considerably due to a lack of ventilation.

In **OMNITEC** we offer you our extensive experience to assist you in planning your installation and get the most out of our mini-bars. Following our indications your guests will enjoy maximum comfort.

ventilation system

The basic concept is to allow air to circulate around the minibar to evacuate the heat generated by the cooling system.

On all **OMNITEC** Minibars, the cooling system is located at the rear of the unit. For optimal performance there should be an intake at the front base of the minibar, and an outlet at the top of the backside to allow cool air to flow under the minibar, along the back, evacuating hot air at the top.

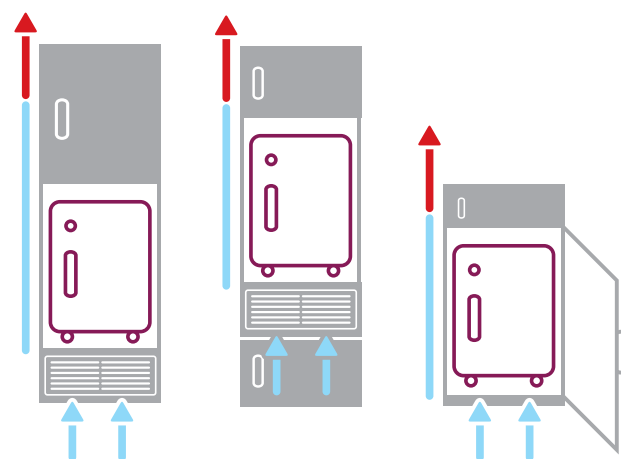

cool sensations for your guests

International Experience



REFERENCES



Iberostar Santa Eulalia 4* Spain
Barceló Torre de Madrid 4* Spain
Radisson Blu Podil 4* Ukraine
Fergus Style Palmanova 4* Spain
Crown Paradise Vallarta 5* Mexico
Hard Rock Kantenah 5* Mexico
Finest Isla Mujeres 5* Spain
Hard Rock Hotel Ibiza 5* Spain

Hilton Tanger 4* Morocco
The Grange Hotel 5* United Kingdom
Hôtel Faidherbe 3* France
Dream Hotel 4* Belgium
Hotel Dina Morgabine 3* Reunion
Hotel Africa Jade 4* Tunisia
Heston Hide Hotel 4* United Kingdom
Santa Catalina 5* Spain

look for more references in our website