




# S A F E EXO

## INNOVATIVE ELECTRONICS & SAFETY REFERRAL

Installation, management and maintenance via Bluetooth with a mobile app controlled by the administrator.

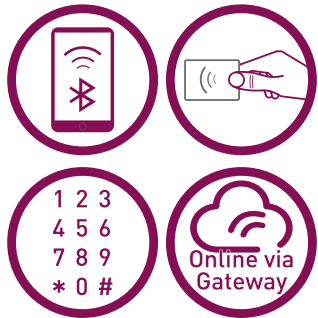

Opening via Bluetooth,  
Proximity & Numerical Code  
Online remote management



# Think Open

## HIGH PERFORMANCE TECHNOLOGY


- **Security BI-MASTER** offers the administrator two code modes: fixed programmable and random single-use opening.
- **Control**, installing the EXO safe, the OMNITEC lock and a Gateway in the same room allows you to manage and control both devices remotely. A pioneering and exclusive **OMNITEC SET** that enables the **GUEST-PRESENCE Security Self-lock**: the safe is only activated when the room lock is opened by the guest.



### GESTION & APERTURA



opening & admin



ExoSafe

Mobile APP for both the installation configuration, management of permits and user openings

### CONNECTIVITY



Remote opening & management, including Gateways in the installation.



## FUNCTIONALITY, COMFORT AND VERSATILITY




110° wide opening  
hinge for greater  
comfort



LED interior  
lighting



Installation &  
management with  
mobile APP

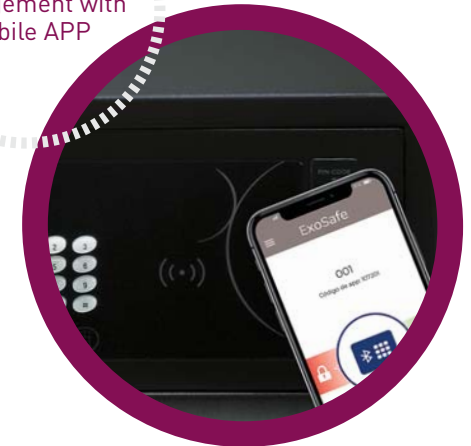

EXO BI-MASTER SINGLE USE RANDOM CODE



UNLIMITED AUDIT TRAIL FOR OPENINGS & CLOSINGS

### CUSTOMISABLE | AD HOC PROJECTS



CHANGE OF DIMENSIONS



CHANGE OF COLOUR, RAL CHART



LEFT OPENING DOOR



## EXO ELECTRONIC SAFE

### MATERIAL CHARACTERISTICS

Carbon steel  
 Steel thickness:  
 Body 2mm / Door 5mm  
 Display: 6 digits  
 Inner LED  
 Inner carpet  
 4 AA Alkaline batteries (included)  
 Fix: Base and Back  
 Colour : Black  
 Optional Colour: RAL chart  
 Rubber muffler  
 Optional left open  
 Optional laser cut  
 Steel bolts  
 Concealed hinges  
 Anticorrosive paint  
 Opening spring

### FUNCTIONS

Motorized closing  
 Opening:  
 Code, Proximity & Bluetooth  
 4-6 digits code  
 Unlimited audit (opening + close)  
 Emergency open key  
 Emergency open master code:  
 EXO BI-MASTER  
 Acoustic and visual signal  
 Audit via APP  
 Unit program handle via APP  
 Rental activation lock  
 Optional multizone socket  
 Optional power supply  
 External power supply:  
 Powerbank (not included)

### MODELS | SIZES

(height x width x depth)

STANDARD: 200 x 360 x 220 mm  
 PAD: 200 x 360 x 270 mm  
 LAPTOP 15: 200 x 430 x 350 mm  
 LAPTOP 17: 200 x 400 x 480 mm  
 FOLDER: 200 x 430 x 400 mm  
 AVANT 15: 120 x 400 x 350 mm  
 AVANT 17: 120 x 400 x 480 mm



## INNOVATION, TECHNOLOGY, DESIGN

## standard features

- Motorized opening and closing, with 4 to 6 digit **customer code**, Proximity and Bluetooth.
- Maintenance and management with **Mobile APP**: no limit to the number of events recorded, battery level check, set-up of the installation, generation of **single use master code**.
- **Self-locking GUEST-PRESENCE**: in installations with EXO safe, Omnitec locks and Gateway, **the safe will only be activated when the room lock is opened by the guest**. Whenever any other person enters the room, the safe remains disconnected.
- EXO Bi-Master provides the administrator **two code modes**: **fixed programmable and random single-use opening**.
- Emergency opening via master code and hidden mechanical key.
- **Different types of codes** and Bluetooth authorisations: temporary, single use, permanente and cyclic.
- ADA keyboard for the visually impaired.
- Low consumption LED interior lighting.
- **110° wide opening hinge** to insert belongings without risk of damaging them.
- Power port for exhausted batteries.

## optional accessories

- Interior multi-zone socket, with USB option.
- Power supply, avoids the use of batteries and minimizes maintenance.

P.I. Empresarium, C/ Retama 20-22, Naves 15 y 16 • 50720 ZARAGOZA (Spain)

**T +34 976 107 201 • F +34 976 455 578**

info@omnitecsystems.com • [www.omnitecsystems.com](http://www.omnitecsystems.com)