

A model

The ideal solution for those hotels looking for a practical and functional minibar with a high level of comfort for their guests.



FUNCTIONALITY

Features that fit all hotels



general characteristics

- **Technology:** absorption, traditional system for hotels
- **Voltage:** 220-240 V (110 V optional)
- **Power:** 53 W
- **Energy Efficiency:** D

standard features

- Silent, 0dB
- Auto-defrost
- Thermostat
- Additional hinge for left opening. Easy and fast change
- Low consumption interior LED
- Adjustable trays and racks, maximum use of available space

available dimensions

volume	dimensions height x width x depth	consumption
25 litres	443 x 400 x 390 mm	0,70 Kw/24 h
30 litres	533 x 400 x 412 mm	0,73 Kw/24 h
40 litres	543 x 435 x 453 mm	0,75 Kw/24 h
50 litres	570 x 455 x 480 mm	0,73 Kw/24 h

specific project options



Lock on the minibar door



Casters



Fixed light door opening indicator



Different colors available



Sliding guide



Glass door with bottle rack
Personalization optional
(not available in EU countries)

Absolute silence for maximum comfort

The A model absorption minibars provide the hotel with a high level of comfort with reduced power consumption. Silent and functional, they fit the needs of hotels of every size and category.

OMNITEC, international partner for quality and performance



Minibars

cool sensations for your guests
International Experience



recommendations for installation

Our minibars will reach their **maximum performance, minimum consumption** and longest life span working under appropriate conditions of heat diffusion.

Following the directions shown below will allow the minibar to operate at its optimal performance level and therefore yield the highest return on investment.

environmental conditions


The ambient room temperature is crucial for the proper functioning of the minibar. A high ambient temperature reduces the airflow around the minibar and its ability to dissipate heat, this will influence the performance of the minibar considerably due to a lack of ventilation.

In **OMNITEC** we offer you our extensive experience to assist you in planning your installation and get the most out of our mini-bars. Following our indications your guests will enjoy maximum comfort.

ventilation system

The basic concept is to allow air to circulate around the minibar to evacuate the heat generated by the cooling system.

On all **OMNITEC** Minibars, the cooling system is located at the rear of the unit. For optimal performance there should be an intake at the front base of the minibar, and an outlet at the top of the backside to allow cool air to flow under the minibar, along the back, evacuating hot air at the top.

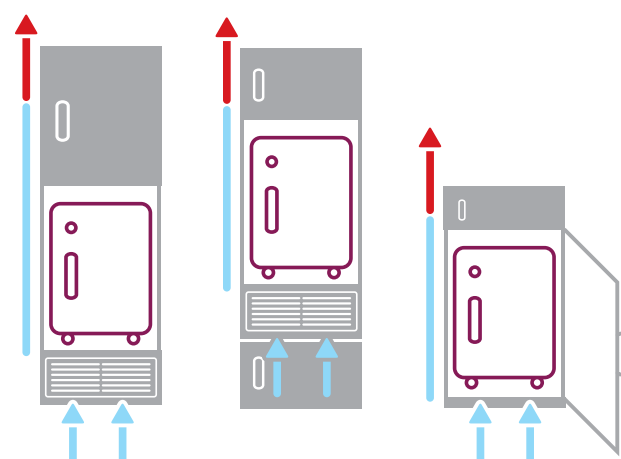

REFERENCES



- | | |
|-----------------------------------|-------------------------------------|
| Iberostar Santa Eulalia 4* Spain | Hilton Tanger 4* Morocco |
| Barceló Torre de Madrid 4* Spain | The Grange Hotel 5* United Kingdom |
| Radisson Blu Podil 4* Ukraine | Hôtel Faidherbe 3* France |
| Fergus Style Palmanova 4* Spain | Dream Hotel 4* Belgium |
| Crown Paradise Vallarta 5* Mexico | Hotel Dina Morgabine 3* Reunion |
| Hard Rock Kantenah 5* Mexico | Hotel Africa Jade 4* Tunisia |
| Finest Isla Mujeres 5* Spain | Heston Hide Hotel 4* United Kingdom |
| Hard Rock Hotel Ibiza 5* Spain | Santa Catalina 5* Spain |

look for more references in our website