

## PURE model

Minibar that features the highest technical specifications and technologies for hotels that demand a top of the range minibar.



### High performance for the most demanding hotels

The PURE minibar combines a modern and elegant interior design with advanced technology components such as an oversized diffuser and a smart thermostat which cannot be adjusted by the guest.

OMNITEC, international partner for quality and performance

### general characteristics

- **Technology:** absorption, with oversized diffuser
- **Voltage:** 220-240 V (110 V optional)
- **Power:** 53 W

### standard features

- Silent, 0dB
- Auto-defrost
- Oversized diffuser
- Microprocessor controlled thermostat
- Additional hinge for left opening. Easy and fast change
- Electronic interior LED
- Trays and racks adjustable in height and depth, maximum use of the minibar
- Higher isolation, reduces consumption and increase its cooling power

### COMFORT

Modern design and limited consumption to satisfy the most demanding customers

### DESIGN



### PERFORMANCE AND EFFICIENCY



### available dimensions

volume	dimensions height x width x depth	consumption
30 litres	525 x 385 x 430 mm	0,68 Kw/24 h
40 litres	543 x 435 x 453 mm	0,68 Kw/24 h

### specific project options



Lock on the minibar door



Casters



Fixed light door opening indicator




Different colors available



Sliding guide



Glass door with bottle rack  
Personalization optional



## Minibars

### recommendations for installation

Our minibars will reach their **maximum performance, minimum consumption** and longest life span working under appropriate conditions of heat diffusion.

Following the directions shown below will allow the minibar to operate at its optimal performance level and therefore yield the highest return on investment.

### environmental conditions


The ambient room temperature is crucial for the proper functioning of the minibar. A high ambient temperature reduces the airflow around the minibar and its ability to dissipate heat, this will influence the performance of the minibar considerably due to a lack of ventilation.

In **OMNITEC** we offer you our extensive experience to assist you in planning your installation and get the most out of our mini-bars. Following our indications your guests will enjoy maximum comfort.


### ventilation system

The basic concept is to allow air to circulate around the minibar to evacuate the heat generated by the cooling system.

On all **OMNITEC** Minibars, the cooling system is located at the rear of the unit. For optimal performance there should be an intake at the front base of the minibar, and an outlet at the top of the backside to allow cool air to flow under the minibar, along the back, evacuating hot air at the top.

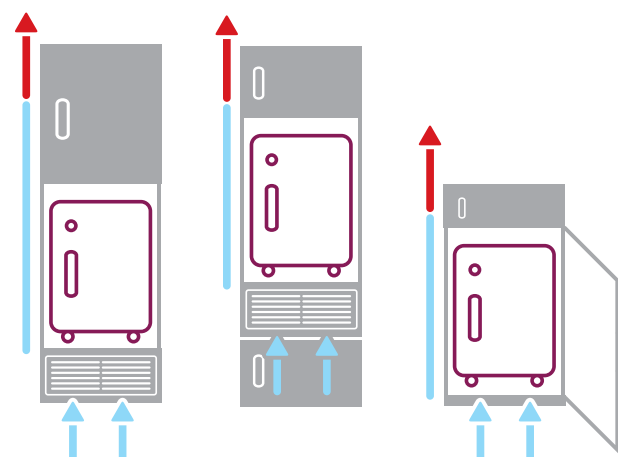

**cool sensations** for your guests  
International Experience

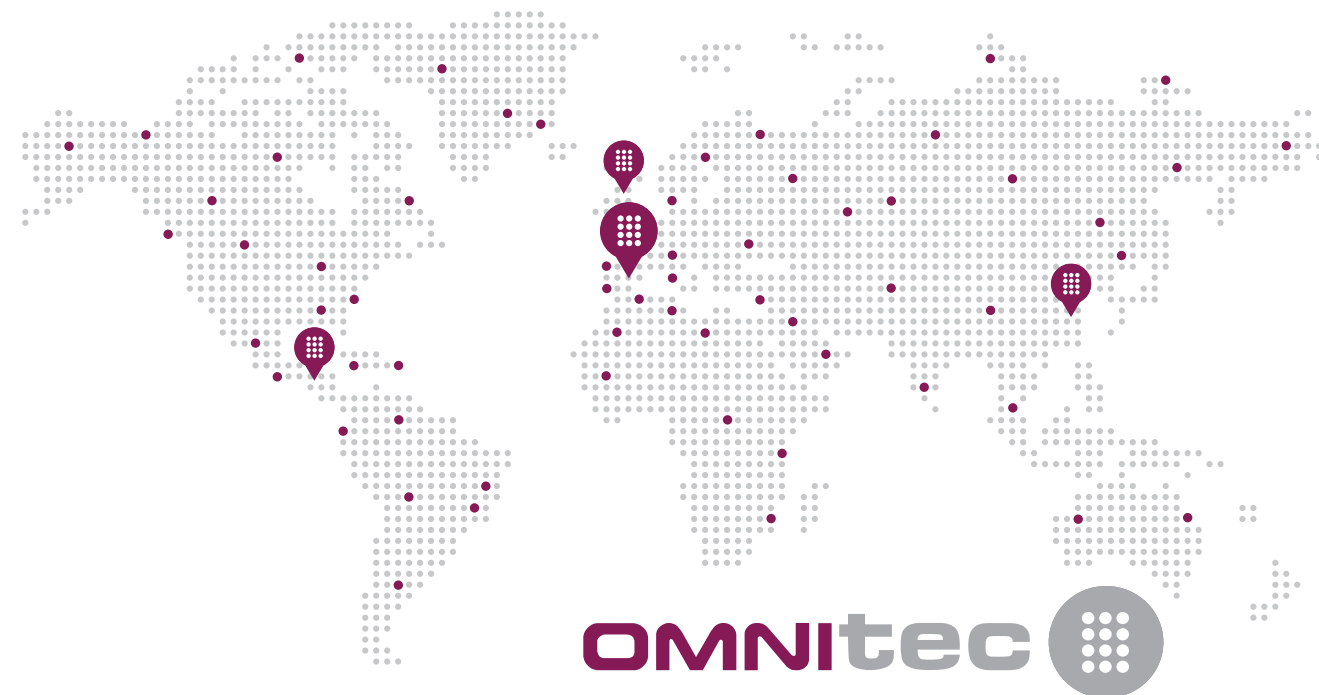

**OMNITEC**

### REFERENCES



Iberostar Santa Eulalia 4\* Spain  
Barceló Torre de Madrid 4\* Spain  
Radisson Blu Podil 4\* Ukraine  
Fergus Style Palmanova 4\* Spain  
Crown Paradise Vallarta 5\* Mexico  
Hard Rock Kantenah 5\* Mexico  
Finest Isla Mujeres 5\* Spain  
Hard Rock Hotel Ibiza 5\* Spain

Hilton Tanger 4\* Morocco  
The Grange Hotel 5\* United Kingdom  
Hôtel Faidherbe 3\* France  
Dream Hotel 4\* Belgium  
Hotel Dina Morgabine 3\* Reunion  
Hotel Africa Jade 4\* Tunisia  
Heston Hide Hotel 4\* United Kingdom  
Santa Catalina 5\* Spain

look for more references in our website