

NOBLE model

Minibars with thermoabsorption technology are the right choice for hotels looking for a quiet and functional minibar, without having to make any large investments.



SILENCE

No moving parts in the cooling system



Thermoabsorption minibars incorporate mixed Peltier/Absorption technology. The liquid coolant gasifies after absorbing the heat from the evaporator, then liquifies slowly while it goes through the condenser, the heat is dissipated evenly at the same time. The liquid comes down to the evaporator through gravity.

Silence guaranteed, no moving parts

The NOBLE model thermoabsorption minibars provide confort and functionality to your guests without assuming large investments and with low maintenance costs for the hotel.

No moving parts and no fans, absolute silence guaranteed.

OMNITEC, international partner for quality and performance

general characteristics

- **Technology:** thermoabsorption
- **Voltage:** 220-240 V (110 V optional)
- **Power:** 65 W
- **Energy Efficiency:** up to A+

standard features

- Silent, 0dB
- CFC Free, environmentally friendly
- Auto-defrost
- Adjustable thermostat
- Low consumption LED lamp
- Same hinge for left or right opening. Easy and fast change
- Adjustable tray and racks, maximum use of available space
- 3-layer glass door

available dimensions

	volume gross/net	dimensions height x width x depth	consumption	efficiency
	28/19 litres	475 x 380 x 380 mm	0,30 Kw/24h	A
	36/25 litres	475 x 380 x 445 mm	0,39 Kw/24h	B
	40/32 litres	545 x 405 x 434 mm	0,26 Kw/24h	A+
Glass door	26/19 litres	465 x 380 x 380 mm	0,45 Kw/24h	B
	30/27 litres	465 x 380 x 440 mm	0,45 Kw/24h	B

specific project options



Sliding guide



Lock on the minibar door



Casters



Minibars

cool sensations for your guests

International Experience



recommendations for installation

Our minibars will reach their **maximum performance, minimum consumption** and longest life span working under appropriate conditions of heat diffusion.

Following the directions shown below will allow the minibar to operate at its optimal performance level and therefore yield the highest return on investment.

environmental conditions


The ambient room temperature is crucial for the proper functioning of the minibar. A high ambient temperature reduces the airflow around the minibar and its ability to dissipate heat, this will influence the performance of the minibar considerably due to a lack of ventilation.

In **OMNITEC** we offer you our extensive experience to assist you in planning your installation and get the most out of our mini-bars. Following our indications your guests will enjoy maximum comfort.

ventilation system

The basic concept is to allow air to circulate around the minibar to evacuate the heat generated by the cooling system.

On all **OMNITEC** Minibars, the cooling system is located at the rear of the unit. For optimal performance there should be an intake at the front base of the minibar, and an outlet at the top of the backside to allow cool air to flow under the minibar, along the back, evacuating hot air at the top.

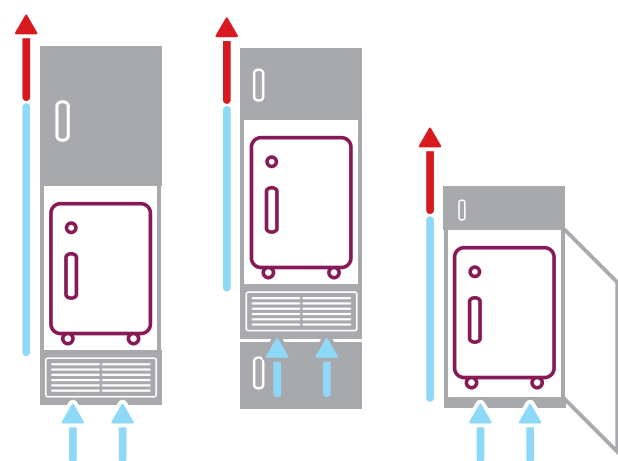

REFERENCES



- | | |
|-----------------------------------|-------------------------------------|
| Iberostar Santa Eulalia 4* Spain | Hilton Tanger 4* Morocco |
| Barceló Torre de Madrid 4* Spain | The Grange Hotel 5* United Kingdom |
| Radisson Blu Podil 4* Ukraine | Hôtel Faidherbe 3* France |
| Fergus Style Palmanova 4* Spain | Dream Hotel 4* Belgium |
| Crown Paradise Vallarta 5* Mexico | Hotel Dina Morgabine 3* Reunion |
| Hard Rock Kantenah 5* Mexico | Hotel Africa Jade 4* Tunisia |
| Finest Isla Mujeres 5* Spain | Heston Hide Hotel 4* United Kingdom |
| Hard Rock Hotel Ibiza 5* Spain | Santa Catalina 5* Spain |

look for more references in our website